


## TECHNICAL SYSTEM SHEET CP TSS CEF 14 065

**CrownCoat™ MER - 7521 CrownPro™ AcidShield™ Novolac Epoxy Pigmented Mechanical Equipment Reinforced Room Flooring System. Comprised of a Novolac Epoxy Primer, 1<sup>st</sup> Semi-Rigid Epoxy Membrane, Scrim or Fiber Glass Reinforcement, and 2<sup>nd</sup> Semi-Rigid Membrane Pigmented Epoxy Coating, Novolac Epoxy Grout Coat and Top Coat, placed at a Nominal 65 Mils (1.65 mm).**

### DESCRIPTION

**CrownCoat™ 7521 CrownPro™ AcidShield™ Novolac Epoxy Pigmented Mechanical Equipment Flooring System. The system is placed at a nominal 65 mils (1.65 mm). It is comprised of a primer, 1<sup>st</sup> semi-rigid epoxy membrane optional dimensional scrim or fiber glass, 2<sup>nd</sup> semi-rigid epoxy membrane, and top coat, with or without an optional sprinkling of skid resistant aluminum oxide aggregate. It can be applied directly over Crown Polymers 8303 CrownShield® moisture mitigation primer when it is required. It is available with an optional integral cove base binder and natural quartz aggregate. It is also available with an optional fluid proofing and crack suppression membrane. It is VOC Compliant in all states and provinces in North America.**

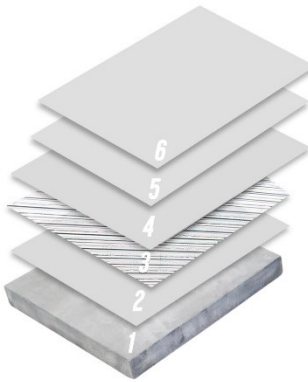

### **CrownCoat™ MER 7521 CrownPro™ AcidShield™ Novolac Epoxy Pigmented Mechanical Equipment Room Reinforced Flooring System**

1. Concrete Substrate Profile – ICRI Concrete Surface CSP 2 to CSP 4
2. Self-Priming Semi-Rigid Membrane – 8502 CrownFlex™ Pigmented Placed at 80 sq. ft. (7.4 sq. m.) 20 mils (0.51 mm), and
3. Embed Scrim Cloth 1.6 oz. per yd. or Fiber Glass Matt 1.5 oz. yd. Reinforcement Cloth in Step 2
4. 8502 CrownFlex Pigmented 80 sq. ft. (7.4 sq. m.) 20 mils (0.51 mm)
5. Grout Coat – 7521 CrownPro™ AcidShield™ Pigmented place at 160 sq. ft. (14.9 sq. m.) 10 mils (0.25 mm)
6. Top Coat – 7521 CrownPro™ AcidShield™ Pigmented 160 sq. ft. (14.9 sq. m.) 10 mils (0.25 mm)

### OPTIONAL COMPONENTS

- Optional Finish Coat - 8175 CrownPro™ Polyaspartic Clear 160 sq. ft. (14.9 sq. m) 10 mils (0.24mm)
- Optional Moisture Mitigation Primer - 8303 CrownShield® Clear 100 sq. ft. (9.3 sq. m) 16 mils (0.41 mm)
- Optional Skid-Resistance 60 mesh aluminum oxide SP635 placed as sprinkle coarse of 4 to 6 pounds (1.8 to 2.7 kg.) per 100 sq. ft. (9.3 sq. m.)
- Optional Cove Binder – 8503 CrownFlex™ Thixotropic Epoxy Pigmented and SP604 natural quartz aggregate.

Note: See individual Technical Data Sheets for information about each product.

### TYPICAL USES - Mechanical Equipment

#### Rooms In:

- Automotive Shops and Mechanics Floors
- Commercial Buildings
- Hospital and Health Care Facility Floors
- Laboratories and Research Floors
- Pharmaceutical Floors
- School and University Floors

Note: Use appropriate Finish Coat

### BENEFITS

- Complies with USDA, FDA, Food Safety Modernization Act. See Crown Polymers Technical Bulletin: 3 Food and Beverage Compliance.
- Slip Resistance (ADA) See Crown Polymers Technical Bulletin: 4 Coefficient of Friction.
- LEED® and Green Seal® requirements. See Crown Polymers Technical Bulletin: 5 LEED and Green Seal Information.
- VOC and EPA Compliant, and low odor during installation. Cures to an inert finish. See Crown Polymers Technical Bulletin: 2 VOC Compliance
- All components are VOC Compliant in all states and provinces in North America
- Strong and Tough Floor.
- Excellent Chemical and Abrasion Resistance
- Designed for new floors and for resurfacing old floors

### LIMITATIONS

- These systems are best suited for applications in temperatures between 60°F to 90°F (16°C to 32°C).
- Higher temperatures will result in shortened working time and faster drying time.

- Do not use as a primer when concrete slab exceeds 3 lbs. or 80% RH.

**COLORS**

15 Standard Colors\* and Custom Colors. Available in factory pigmentation or CrownPigment™ Epoxy 6300 PigmentPack™ \*See Crown Polymers Standard Color Guide Acrylics, Epoxies, Polyaspartics, Polyurethanes (PigmentPack).

**CONCRETE**

Concrete must be structurally sound and free of curing agents, coatings, sealers, densifiers and other bond breakers.

**New Concrete:**

- Place concrete per ACI 302.2R Guide for Concrete Slabs that Receive Moisture-Sensitive Floor Materials.
- Water Cement Ratio 0.4 to 0.5 at approximately a 4,000 psi (28 MPa) strength level.
- Requiring a positive side moisture barrier in direct contact with the concrete meeting ASTM E1745 Standard Specification for Plastic Water Retarders Used in Contact with Soil or Granular Fill under Concrete Slabs.
- The moisture barrier needs to be placed per ASTM E1643 Standard Practice for Selection, Design,

Installation of Water Vapor Retarders Used in Contact with Earth or Granular Fill Under Concrete Slabs, Class A 15 mils (0.38mm).

**Existing Concrete:**

Should field tests or laboratory analysis reveals that the concrete flooring slabs containing contaminants such as silicate densifiers or curing compounds that will interfere with the bonding use Crown Polymers 8201 CrownPrime preprimer.

- Contaminants include, but are not limited to: organic hydrocarbon materials, calcium chlorides and aluminum stearates.
- Concrete flooring slabs can lose their structural strength over time, caused by conditions beyond the control of the flooring manufacturer or the installation contractor.
- If the concrete substrate deteriorates sufficiently, it will no longer support the bond of the remediation floor system.

Such conditions are detailed in ACI 201.2R “Guide to Durable Concrete” published by the American Concrete Institute. See Crown Polymers Technical Bulletin: 1 Concrete Surface Preparation.

<b>Mechanical Properties at 77°F (25°C) 7 Day Cure (7521 CrownPro™ AcidShield™) For Complete Details See 7521 CrownPro™ AcidShield™ Technical Data Sheet</b>	
<b>Surface Preparation ICRI Guideline No. 310.2R (CSP 2 to CSP 4), Depending on System being Installed and Concrete Condition.</b>	
<b>Compressive Strength, ASTM D695</b>	<b>10,500 psi (72.4 MPa)</b>
<b>Compressive Modulus, ASTM D695</b>	<b>300,000 psi (2068.4 MPa)</b>
<b>Tensile Strength, ASTM D638</b>	<b>6,500 psi (44.8 MPa)</b>
<b>Tensile Elongation, ASTM D638</b>	<b>2%</b>
<b>Adhesion, ASTM D7234</b>	<b>&gt;400 psi (2.75 MPa)</b>
<b>Hardness (Shore D) ASTM D2240</b>	<b>85</b>
<b>Water Absorption, ASTM D570</b>	<b>0.15%</b>
<b>Microbial (fungi) Resistance, ASTM G21 without an anti-microbial agent)</b>	<b>Pass &lt; 1</b>
<b>Dynamic Coefficient of Friction, ANSI 326.3, Depends on Finished Coat Texture. This test must be run in the field after placement of the Finish Coat by a BOT 3000E Third Party Testing Firm to Validate.</b>	<b>&gt;0.45 (inclines) &gt;0.42 (level)</b>
<b>Moisture Vapor Emission Rate, ASTM F1869*</b>	<b>3 lbs.</b>
<b>Moisture Relative Humidity, ASTM F2170*</b>	<b>80% rh</b>
<b>*If moisture or relative humidity exceeds the test limits consult a Crown Polymers representative and refer to Crown Polymers Technical Bulletin 6 Moisture Mitigation Negative Side Moisture Barrier.</b>	
<b>Note: Although testing is critical, it is not guaranteed against future Problems. This is especially true if there is not a positive side vapor barrier installed per ACI 302.2R and ASTM F1754. Concrete must be sound and durable per ACI 201.2R and be free of bond breaking properties and/or concrete contamination from oil, chemical spills, densifiers, excessive salts and other bond breakers.</b>	

## **CHEMICAL RESISTANCE DATA**

See Crown Polymers Technical Bulletin: 9 Chemical Resistance Guidelines and Chart.

## **CHECK CONCRETE MOISTURE**

Concrete must be dry before application of this floor coating material. Concrete moisture tests are required, either ASTM F1869 (calcium chloride) or ASTM F2170 (in situ RH probe). Refer to appropriate Technical Data Sheet limits and Crown Polymers Technical Bulletin: 6 Moisture Mitigation Negative Side Moisture Barrier.

## **CHECK TEMPERATURE and HUMIDITY**

Floor and material temperature must be at or above the published Technical Data Sheet. Relative Humidity must be 5°F (3°F) below the dew point. Do not apply if humidity is at or above 95%. See Crown Polymers Technical Bulletin: 7 Temperature and Relative Humidity Limits.

## **SURFACE PREPARATION**

Surface preparation in accordance with: ICRI Guideline No. 310.2R Selecting and Specifying Concrete Surface Preparation for Sealers, Coatings, Polymer Overlays, and Concrete Repair. The pH of the concrete substrate should be at 9 or above. All bond-breaking material must be removed. See Crown Polymers Technical Bulletin: 1 Concrete Surface Preparation.

## **OPTIONAL ANTIMICROBIAL**

The antimicrobial additive is a non-heavy metal biocide that can be added during the manufacturing process. The antimicrobial agent can be added to the top coat only for an economical application or it can be added to each step of the application, primer, body coat and top coat, which is recommended for abusive environments. See Crown Polymers Technical Bulletin: 11 Understanding the Optional Antimicrobial Additive.

## **MIXING**

For ease of mixing and placement, the temperature of the “A” and “B” components should be between 70°F to 80°F (20°C to 26°C). Pre-mix the “A” and “B” component to ensure all raw material and pigments are dispersed uniformly. See Crown Polymers Technical Bulletin: 10 Mixing Guidelines.

## **APPLICATION**

Place all steps per Crown Polymer Installation Guidelines.

## **SKID-RESISTANCE**

Skid-Resistance – Field (in situ) Wet Dynamic Coefficient of Friction (DCOF), ANSI A326.3. See Crown Polymers Technical Bulletin: 4 Coefficient of Friction.

## **CLEAN-UP**

Clean-up mixing station, tools and equipment as required. Use acetone, a VOC exempt solvent, for cleaning up. Observe all legal, and health and safety precautions when handling or storing solvents and materials, particularly in confined spaces. Make sure the working areas are well ventilated at all times during placement and curing time.

## **DISPOSAL**

Dispose of empty packaging and other waste in accordance with federal, state, provinces and local regulations.

## **MAINTENANCE**

Inspect the installed floor by spot cleaning and spot repairing the damaged or cracked areas. To prolong life of the flooring system, a daily maintenance program is highly recommended to ensure the floor is safe for its intended purposes. See Crown Polymers Technical Bulletin: 8 Care and Maintenance.

## **TECHNICAL SUPPORT**

**For questions, contact a Crown Polymers Representative.**

### **DISCLAIMER**

All technical bulletins, installation guidelines, guidelines, recommendations, statements, specifications, and technical data contained herein are based on information and tests. The accuracy and completeness of such tests are not guaranteed and are not to be construed as a warranty, expressed or implied. It is the responsibility of the user to document information and tests to determine the intent of the product for ones' own use. The application, job conditions and user assume all risks and liability resulting from use of the product. We do not suggest or guarantee any hazards listed herein are the only ones, which may exist. Neither seller nor manufacturer shall be liable to the buyer or any third person for any injury, loss or damage directly or indirectly resulting from use of, or inability to use the product. Recommendations or statements, whether in written or verbal, other than those contained herein shall not be binding upon the manufacturer, unless in writing and signed by a corporate officer of the manufacturer. Technical and application information is provided for the purpose of establishing a general profile of the material and proper application procedures. Test performance results were obtained in a controlled environment and Crown Polymers makes no claim that these tests or any other tests accurately represent all environments. Not responsible for any typographical errors.

### **LIMITED WARRANTY**

Crown Polymers warrants its products to be free of manufacturing defects and meets all Crown Polymers current published physical properties. Crown Polymers' sole responsibility shall be to replace the portion of any product proved to be defective. There are no other warranties by Crown Polymers of any nature whatsoever expressed or implied, including any warranty of merchantability or fitness for a particular purpose in connection with this product. Crown Polymers shall not be liable for damages of any sort, including remote or consequential damages resulting from any claimed breach of any warranty whether expressed or implied. Crown Polymers shall not be responsible for the use of this product in a manner to infringe on any patent held by others. In addition, no warranty or guarantee pertaining to appearance, color, fading, chalking, staining, shrinkage, peeling, normal wear and tear or improper application by the applicator will be issued. Damage caused by abuse, neglect and lack of proper maintenance, acts of nature and/or physical movement of the substrate or structural defects are also excluded from the limited warranty. Crown Polymers reserves the right to conduct performance tests on any material claimed to be defective prior to any repairs by owner, general contractor, or applicator.

**FOR INDUSTRIAL USE ONLY. KEEP OUT OF REACH OF CHILDREN. KEEP CONTAINERS TIGHTLY CLOSED.**