


8370 TerraCrown® Coat	...	10 Ft <sup>2</sup> /Gal
8373 TerraCrown® MVB	...	100 Ft <sup>2</sup> /Gal
8371 TerraCrown® Primer	...	200 Ft <sup>2</sup> /Gal
Prepared Concrete	...	CSP 2-4

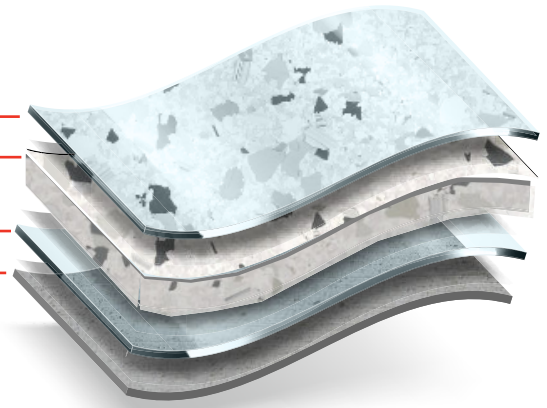

## OPTIONAL COMPONENTS

- **Moisture Mitigation Primer :**  
8303 CrownShield® Clear 100 ft<sup>2</sup>/gal @ 16 mils
- **Waterproofing & Crack Suppression Membrane :**  
8372 TerraCrown™ Clear 40 ft<sup>2</sup>/gal @ 40 mils

\*For complete details refer to each optional components Technical Data Sheet (TDS).

## MECHANICAL PROPERTIES

For complete details refer to each components Technical Data Sheet (TDS)

## CHEMICAL RESISTANCE

Refer to CrownTech Chemical Resistance Guideline Technical Bulletin No. 9

## SYSTEM DESCRIPTION

TerraCrown® Terrazzo is a pigmented two-component epoxy binder that is used to create the most decorative polymer floors in the construction industry. It is installed at a normal thickness of 375 mils (3/8"). The thickness of the installation affects the aggregate sizes. The most common chips are marble, which naturally occurs in different colors and different MOHs hardness. Recycled glass adds both color, mirrored glass creates a three-dimensional depth, while Mother of Pearl, other aggregates and pigment colors are incorporated to create unique "one of a kind" looks. It is VOC Compliant in all states and provinces in North America. Meets: 1. NTMA (National Terrazzo and Mosaic Association) 2. TTMAC (Terrazzo, Tile and Marble Association of Canada).

## TYPICAL USES

- Airport, Bus, Train Terminals
- Retail Spaces & Mall Common Areas
- School & Universities
- High End Designer Floors
- Hotel Lobbies & Office
- Hospital and Health Care Facility Floors
- Pharmaceutical Floors

## BENEFITS

- Complies with USDA, FDA, FSMA. See Crown Polymers Technical Bulletin: 3 Food and Beverage Compliance.
- Slip Resistance (ADA) See Crown Polymers Technical Bulletin: 4 Coefficient of Friction.
- LEED requirements. See Crown Polymers Technical Bulletin: 5 LEED information
- Cures to an inert finish. See Crown Polymers Technical Bulletin: 2 VOC Compliance

## COLORS



Federal Standard 595C & Custom Colors

## DISCLAIMER

All technical bulletins, installation guidelines, guidelines, recommendations, statements, specifications, and technical data contained herein are based on information and tests. The accuracy and completeness of such tests are not guaranteed and are not to be construed as a warranty, expressed or implied. It is the responsibility of the user to document information and tests to determine the intent of the product for ones' own use. The application, job conditions and user assume all risks and liability resulting from use of the product, We do not suggest or guarantee any hazards listed herein are the only ones, which may exist, Neither seller nor manufacturer shall be liable to the buyer or any third person for any injury, loss or damage directly or indirectly resulting from use of, or inability to use the product. Recommendations or statements, whether in written or verbal, other than those contained herein shall not be binding upon the manufacturer, unless in writing and signed by corporate officer of the manufacturer. Technical and application information is provided for the purpose of establishing a general profile of the material and proper application procedures. Test performance results were obtained in a controlled environment and Crown Polymers makes no claim that these tests or any other tests accurately represent all environments. Not responsible for typographical errors.

## LIMITED WARRANTY

Crown Polymers warrants its products to be free of manufacturing defects and meets all Crown Polymers current published physical properties. Crown Polymers' sole responsibility shall be to replace the portion of any product proved to be defective. There are no other warranties by Crown Polymers of any nature whatsoever expressed or implied, including any warranty of merchantability or fitness for a particular purpose in connection with this product. Crown Polymers shall not be liable for damages of any sort, including remote or consequential damages resulting from any claimed breach of any warranty expressed or implied. In addition, no warranty or guarantee pertaining to appearance, color, fading, chalking, staining, shrinkage, peeling, normal wear and tear or improper application by applicator will be issued. Damage caused by abuse, neglect and lack of proper maintenance, acts of nature and/or physical movement of substrate or structural defects are also excluded from limited warranty.