


320 CrownShield™ Pigmented	...	160 Ft ² /Gal
320 CrownShield™ Pigmented	...	120 Ft ² /Gal
40 Mesh Silica Sand Broadcast	...	1 Lbs./ Ft ²
320 CrownShield™ Clear w/ Silica Sand	...	18 Ft ² /Gal
Prepared Concrete	...	CSP 2-4

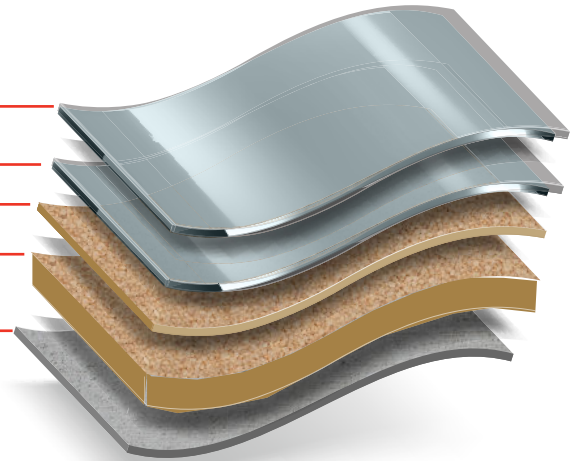

OPTIONAL COMPONENTS

- **Moisture Mitigation Primer :**
8303 CrownShield® Clear 100 ft²/gal @ 16 mils
- **Waterproofing & Crack Suppression Membrane :**
8502 CrownFlex Clear 40 ft²/gal @ 40 mils
- **Cove Binder :**
8503 CrownFlex Thixotropic Epoxy 35 lf/gal @ 6"

*For complete details refer to each optional components Technical Data Sheet (TDS).

PRODUCT SUBSTITUTIONS

- **Chemical Resistance :**
Substitute 320 CrownShield™ with 8320 CrownShield™
- **Low Viscosity :**
Substitute 320 CrownShield™ with 8318 CrownShield™
- **Novolac :**
Substitute 320 CrownShield™ with 7521 AcidShield

*For complete details refer to each optional components TDS.

MECHANICAL PROPERTIES

For complete details refer to each components Technical Data Sheet (TDS)

CHEMICAL RESISTANCE

Refer to CrownTech Chemical Resistance Guideline Technical Bulletin No. 9

SYSTEM DESCRIPTION

CrownSlurry Epoxy System is high-build resurfacing coating designed for durability comprised of 320 CrownShield™ Standard Pigmented Epoxy and Aggregate installed as a Slurry and Single Broadcast Natural Quartz System. The system is placed at a nominal 250 mils (1/4"). It can be applied directly over Crown Polymers moisture mitigation primer. It is available with an optional integral cove base binder and natural quartz aggregate. It is also available with an optional fluid proofing and crack suppression membrane. It is VOC Compliant in all states and provinces in North America.


TYPICAL USES

- Animal Care and Housing
- Commercial Bakeries and Kitchens
- Hospital and Health Care Facility Floors
- Manufacturing Facility Floors
- Pharmaceutical & Vivarium Floors
- Automotive Maintenance & Repair
- Food & Beverage Processing
- Laboratories and Research Floors
- School & University Floors

BENEFITS

- Complies with USDA, FDA, FSMA. See Crown Polymers Technical Bulletin: 3 Food and Beverage Compliance.
- Slip Resistance (ADA) See Crown Polymers Technical Bulletin: 4 Coefficient of Friction.
- LEED requirements. See Crown Polymers Technical Bulletin: 5 LEED information
- Cures to an inert finish. See Crown Polymers Technical Bulletin: 2 VOC Compliance

COLORS

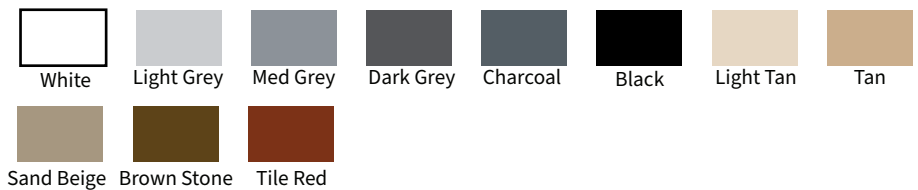

APPLICATION EQUIPMENT

Personal Protective Equipment
Jiffy Mixing Paddle
Slow Speed Drill
18"x3/8" Nap Roller Cover
1/4" Cam Rake
8-12 Mil Notched Squeegee
4" Chip Brush

SURFACE DIAGNOSTICS

Concrete must be structurally sound and free of all contaminants and bond breakers. Test concrete compressive strength using a Schmidt or Rebound Hammer to ensure substrate has compressive strength of 3500 psi or higher.

Perform a PH test using concrete PH test strips or meter to ensure substrate PH is between 9-12.

Perform Moisture Test using either Calcium Chloride per ASTM F1869 or In-Situ Relative Humidity Probe per ASTM F2170 to ensure substrate has Moisture Vapor Emission Rate of 3 lbs or less and Relative Humidity of 80% or less. See CrownTech Bulletin 6: Moisture Mitigation Negative Side Moisture Barrier

If Moisture Vapor Emission Rate is above 3 lbs. but below 25 lbs. and relative humidity is above 80% but below 99% then apply 8303 Moisture Barrier Primer first at 16 mils with a coverage rate of 100 Ft²/ Gal.

SURFACE PREPARATION

Use Mohs scratch test to determine concrete hardness for proper diamond bond selection.

Concrete should be mechanically profiled and prepared to produce a Concrete Surface Profile (CSP) level between #2 & #4 per ICRI Guideline no. 310.2R. See CrownTech Bulletin 1: Concrete Surface Preparation.

All perimeter areas of coating termination shall be masked for protection. Saw cut and key-in all termination points.

SURFACE REPAIR

All depressions, divots and cracks should be profiled and free of dust and contaminants. Repair surface imperfections to reduce the ability to see the defect through the coating. Honor all dynamic (moving) joints, static joints may be filled, use dynamic joints as initiation and termination points during application process where needed.

TEMPERATURE EVALUATION

Ambient and substrate temps should be above 50°F and a minimum of 5°F above Dew Point.

Product temps should be between 70-80°F.

Relative Humidity should not exceed 80%. See CrownTech Bulletin 7: Temperature & Relative Humidity

REFER TO SAFETY DATA SHEETS (SDS) FOR SAFETY PRECAUTIONS.

SAFETY PRECAUTIONS MUST BE FOLLOWED DURING STORAGE, HANDLING AND USE.

PERSONAL PROTECTIVE EQUIPMENT (PPE)

SHALL BE WORN AT ALL TIMES INCLUDING BUT NOT LIMITED TO LONG SLEEVE SHIRTS OR DISPOSABLE ARM SLEEVES, SAFETY GLASSES, DISPOSABLE NITRILE GLOVES, AND PROPERLY FITTED NIOSH RESPIRATORS

ALL SOURCES OF IGNITION SHOULD BE TURNED OFF AND ENVIRONMENT SHOULD HAVE PROPER AND ADEQUATE VENTILATION DURING APPLICATION AND CURING PROCESS

MIXING AREA SHOULD BE PLACED ON OR IN CLOSE PROXIMITY TO PROJECT. AREA SHOULD BE SECURELY COVERED WITH PLASTIC, CARDBOARD OR TARP. STAGE MATERIALS, TOOLS AND CLEANING SUPPLIES IN MIXING AREA PRIOR TO APPLICATION PROCESS.

Do not mix more material than can be applied in 10 minutes

320 MIXING PROCEDURE

1 Pre-Mix A-Component in its respective container using Jiffy mixer and drill at slow speeds for 30 seconds.

2 Pre-Mix B-Component in its respective container using clean Jiffy mixer and drill at slow speeds for 30 seconds or until thoroughly homogeneous.

3 Transfer B-component and A-component at a mix rate of 2A:1B by volume into a clean 5-gal bucket and mix for 1 minute. Slowly add 50# of 40 mesh silica sand to each 3 gallon mix and mix for additional 2 minutes until thoroughly blended

320 COVERAGE RATE

18 Ft² / Gal @ 1/4"

320 WORKING TIME

15 Minutes @ 75°F

320 APPLICATION PROCEDURE

1 Cut-in stem walls using a 4" chip brush. Do not work edges more than 10 minutes ahead of main body of the floor.

Epoxy sets quicker in mass, mixed material should not remain in bucket for extended periods of time

2 Pour a band of mixed material across the surface roughly 4-6" wide. Use 1/4" cam rake to gauge material across surface

3 Back roll the surface with 18" spike roller by walking into the wet material wearing spike shoes and roll the surface wall to wall with overlap perpendicular to your first pass

✓ Immediately broadcast 40 mesh dry silica sand to rejection into wet coating at a rate 1 lbs/ft² and allow coating to dry 6-8 hours.

1 Reclaim loose sand with a push broom and dust pan. Vacuum all residual sand and floor thoroughly.

320 MIXING PROCEDURE

1 Pre-Mix A-Component in its respective container using Jiffy mixer and drill at slow speeds until pigment is uniform.

2 Pre-Mix B-Component in its respective container using clean Jiffy mixer and drill at slow speeds for 30 seconds or until thoroughly homogeneous.

3 Transfer B-component and A-component at a mix rate of 2A:1B by volume into a clean 5-gal bucket and mix for 2-3 minutes being sure to scrape sides of the bucket with a stir stick ensuring both components are thoroughly blended

320 COVERAGE RATE

120 Ft² / Gal @ 13.3 mils wet film

320 WORKING TIME

20 Minutes @ 75°F

320 APPLICATION PROCEDURE

1 Cut-in stem walls using a 4" chip brush. Do not work edges more than 10 minutes ahead of main body of the floor.

Epoxy sets quicker in mass, mixed material should not remain in bucket for extended periods of time

2 Pour a band of mixed material across the surface roughly 4-6" wide. Use flat squeegee to gauge material across surface

3 Back roll the surface with 18" x 3/8" nap roller by walking into the wet material wearing spike shoes and roll the surface wall to wall with overlap perpendicular to your first pass

✓ Allow coating to dry 6-8 hours and proceed with next steps within 24 hours

320 MIXING PROCEDURE

1 Pre-Mix A-Component in its respective container using Jiffy mixer and drill at slow speeds until pigment is uniform.

2 Pre-Mix B-Component in its respective container using clean Jiffy mixer and drill at slow speeds for 30 seconds or until thoroughly homogeneous.

3 Transfer B-component and A-component at a mix rate of 2A:1B by volume into a clean 5-gal bucket and mix for 2-3 minutes being sure to scrape sides of the bucket with a stir stick ensuring both components are thoroughly blended

320 COVERAGE RATE

160 Ft² / Gal @ 10 mils wet film

320 WORKING TIME

20 Minutes @ 75°F

320 APPLICATION PROCEDURE

1 Pour a band of mixed material across the surface roughly 4-6" wide. Use 8-12 mil notched squeegee to gauge material across surface

2 Back roll the surface with 18" x 3/8" nap roller by walking into the wet material wearing spike shoes and roll the surface wall to wall with overlap perpendicular to your first pass

✓ Allow coating to dry
Light Traffic: 24 hours
Heavy Traffic: 48 hours
Equipment/Vehicular Traffic: 72 Hours

SLIP RESISTANCE

Skid-Resistance – Field (in situ) Wet Dynamic Coefficient of Friction (DCOF), ANSI A326.3. See Crown Polymers Technical Bulletin: 4 Coefficient of Friction.

CLEAN-UP

Clean-up mixing station, tools, and equipment as required. Use acetone, a VOC exempt solvent, for cleaning up. Observe all legal, and health, and safety precautions when handling or storing solvents and materials, particularly in confined spaces. Make sure the working areas are well ventilated at all times during placement and curing time.

DISPOSAL

Dispose of empty packaging and other waste in accordance with federal, state, provinces and local regulations.

MAINTENANCE

Inspect the installed floor by spot cleaning and spot repairing the damaged or cracked areas. To prolong life of the flooring system, a daily maintenance program is highly recommended to ensure the floor is safe for its intended purposes. See Crown Polymers Technical Bulletin: 8 Care and Maintenance.

TECHNICAL SUPPORT

For questions, contact a Crown Polymers Representative. Additional Support Documents are available from Crown Polymers, including brochures, application guidelines, videos and more. Visit Crownpolymers.com or contact Crown for additional resources

DISCLAIMER

All guidelines, recommendations, statements, and technical data contained herein are based on information and tests we believe to be reliable and correct, but accuracy and completeness of said tests are not guaranteed and are not to be construed as a warranty, either expressed or implied. It is the user's responsibility to satisfy himself, by his own information and test, to determine suitability of the product for his own intended use, application and job situation and user assumes all risk and liability resulting from his use of the product. We do not suggest or guarantee that any product limitations are the only ones which may exist. Neither Seller nor Manufacturer shall be liable to the buyer or any third person for any injury, loss or damage directly or indirectly resulting from use of, or inability to use, the products. Recommendations or statements, whether in writing or oral, other than those contained herein shall not be binding upon the Manufacturer, unless in writing and signed by an authorized corporate officer of Manufacturer. Technical and application information is provided for the purpose of establishing a general profile of the material and proper application procedures. Test performance results were obtained in a controlled environment and Manufacturer makes no claim that these tests or any other tests accurately represent all environments. Manufacturer is not responsible for typographical errors.



Scan QR code for full Disclaimer and Limited Warranty information