

PHYSICAL PROPERTIES

| | | |
|-------------------------------------|-------|---------------------------------------|
| VOC | | <5 g/L |
| SOLIDS CONTENT | | 100% |
| VOLUMETRIC MIX RATIO | | 1A:1B |
| COVERAGE RATE | | 150 ft ² /gal 10.7 Mils |
| POTLIFE 1 Gal mass @ 75°F | | 10-15 Min |
| DRY TIME @ 75°F | | 2-4 Hours |
| RECOAT WINDOW | | 4-12 Hours |
| FULL CURE | | 7 Days |
| PACKAGING | | 2 Gal Kit 10 Gal Kit |

MECHANICAL PROPERTIES

| | | |
|---------------------------------------|-------|-------------|
| SHORE D HARDNESS ASTM D2240 | | 60-65 |
| TENSILE STRENGTH ASTM D412 | | 1,000 p.s.i |
| ELONGATION ASTM D638 | | 80-100% |
| WATER ABSORPTION ASTM D570 | | 0.6% |

CHEMICAL RESISTANCE

Refer to CrownTech Chemical Resistance Guideline Technical Bulletin No. 9

PRODUCT DESCRIPTION

7000 CrownPro topcoat is a two-component abrasion, chemical, and stain-resistant, fast-curing aliphatic polyaspartic polyurea topcoat. It is available in clear gloss and can be pigmented with CrownPigment PigmentPacks. It cures to an inert, tough, impact, abrasion, and chemical resistance finish coat. It is resistant to mild chemicals, and Excellent adhesion to Crown Polymers epoxy systems. It requires a primer, CrownSeal Acrylic Polyurethane Primer and Concrete Sealer when it is applied to properly prepared concrete and cementitious overlays. 7000 CrownPro topcoat is used as an upgraded topcoat on Crown Polymers products and systems used in facilities subjected to heavy foot traffic, forklift traffic and chemical attack. It is VOC Compliant in all states and provinces in North America


TYPICAL USES

- Aircraft Hangars & Maintenance Floors
- Commercial Bakeries and Kitchens
- Laboratories and Research Floors
- School & Universities
- Automotive Show Room and Repair Areas
- Hospital and Health Care Facility Floors
- Manufacturing and Warehouse Floors
- Pharmaceutical Floors

BENEFITS

- Complies with USDA, FDA, FSMA. See Crown Polymers Technical Bulletin: 3 Food and Beverage Compliance.
- Slip Resistance (ADA) See Crown Polymers Technical Bulletin: 4 Coefficient of Friction.
- LEED requirements. See Crown Polymers Technical Bulletin: 5 LEED information
- Cures to an inert finish. See Crown Polymers Technical Bulletin: 2 VOC Compliance

COLORS

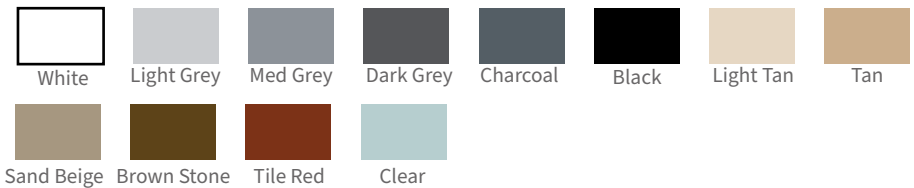

LIMITATIONS

- Higher temp/humidity will result in shortened working times and faster drying time.
- Color may vary due to batch-to-batch variation, always “box” different batches to avoid it.
- Use 8303 CrownShield™ Moisture Barrier when MVT exceeds 3 lbs. or 80% RH
- Do not dilute with solvents
- Heavier applications take longer to cure

SHELF LIFE

1 Year from Date of Manufacture provided unopened

STORAGE

Store in a dry environment at room temperature and out of direct sunlight.

DISCLAIMER

All technical bulletins, installation guidelines, guidelines, recommendations, statements, specifications, and technical data contained herein are based on information and tests. The accuracy and completeness of such tests are not guaranteed and are not to be construed as a warranty, expressed or implied. It is the responsibility of the user to document information and tests to determine the intent of the product for ones’ own use. The application, job conditions and user assume all risks and liability resulting from use of the product, We do not suggest or guarantee any hazards listed herein are the only ones, which may exist, Neither seller nor manufacturer shall be liable to the buyer or any third person for any injury, loss or damage directly or indirectly resulting from use of, or inability to use the product. Recommendations or statements, whether in written or verbal, other than those contained herein shall not be binding upon the manufacturer, unless in writing and signed by corporate officer of the manufacturer. Technical and application information is provided for the purpose of establishing a general profile of the material and proper application procedures. Test performance results were obtained in a controlled environment and Crown Polymers makes no claim that these tests or any other tests accurately represent all environments. Not responsible for typographical errors.

LIMITED WARRANTY

Crown Polymers warrants its products to be free of manufacturing defects and meets all Crown Polymers current published physical properties. Crown Polymers’ sole responsibility shall be to replace the portion of any product proved to be defective. There are no other warranties by Crown Polymers of any nature whatsoever expressed or implied, including any warranty of merchantability or fitness for a particular purpose in connection with this product. Crown Polymers shall not be liable for damages of any sort, including remote or consequential damages resulting from any claimed breach of any warranty expressed or implied. In addition, no warranty or guarantee pertaining to appearance, color, fading, chalking, staining, shrinkage, peeling, normal wear and tear or improper application by applicator will be issued. Damage caused by abuse, neglect and lack of proper maintenance, acts of nature and/or physical movement of substrate or structural defects are also excluded from limited warranty.

APPLICATION EQUIPMENT

Personal Protective Equipment
Jiffy Mixing Paddle
Drill
18" x 3/8" Nap Shedless Roller Cover
8-12 Mil Notched Squeegee
4" Chip Brush
Spike Shoes

SURFACE DIAGNOSTICS

Concrete must be structurally sound and free of all contaminants and bond breakers. Test concrete compressive strength using a Schmidt or Rebound Hammer to ensure substrate has compressive strength of 3500 psi or higher.
Perform a PH test using concrete PH test strips or meter to ensure substrate PH is between 9-12.
Perform Moisture Test using either Calcium Chloride per ASTM F1869 or In-Situ Relative Humidity Probe per ASTM F2170 to ensure substrate has Moisture Vapor Emission Rate of 3 lbs or less and Relative Humidity of 80% or less. See CrownTech Bulletin 6: Moisture Mitigation Negative Side Moisture Barrier

If Moisture Vapor Emission Rate is above 3 lbs. but below 25 lbs. and relative humidity is above 80% but below 99% then apply 8303 Moisture Barrier Primer first at 16 mils with a coverage rate of 100 Ft²/ Gal.

SURFACE PREPARATION

Use Mohs scratch test to determine concrete hardness for proper diamond bond selection.
Concrete should be mechanically profiled and prepared to produce a Concrete Surface Profile (CSP) level between #2 & #4 per ICRI Guideline no. 310.2R. See CrownTech Bulletin 1: Concrete Surface Preparation.
All perimeter areas of coating termination shall be masked for protection. Saw cut and key-in all termination points.

SURFACE REPAIR

All depressions, divots and cracks should be profiled and free of dust and contaminants. Repair surface imperfections to reduce the ability to see the defect through the coating.
Honor all dynamic (moving) joints, static joints may be filled, use dynamic joints as initiation and termination points during application process where needed.

TEMPERATURE EVALUATION

Ambient and substrate temps should be above 50°F and a minimum of 5°F above Dew Point.
Product temps should be between 70-80°F.
Relative Humidity should not exceed 80%. See CrownTech Bulletin 7: Temperature & Relative Humidity

REFER TO SAFETY DATA SHEETS (SDS) FOR SAFETY PRECAUTIONS.

SAFETY PRECAUTIONS MUST BE FOLLOWED
DURING STORAGE, HANDLING AND USE.

PERSONAL PROTECTIVE EQUIPMENT (PPE)

SHALL BE WORN AT ALL TIMES INCLUDING
BUT NOT LIMITED TO LONG SLEEVE SHIRTS OR
DISPOSABLE ARM SLEEVES, SAFETY GLASSES,
DISPOSABLE NITRILE GLOVES, AND PROPERLY
FITTED NIOSH RESPIRATORS

ALL SOURCES OF IGNITION SHOULD
BE TURNED OFF AND ENVIRONMENT
SHOULD HAVE PROPER AND ADEQUATE
VENTILATION DURING APPLICATION AND
CURING PROCESS

MIXING AREA SHOULD BE PLACED ON OR IN
CLOSE PROXIMITY TO PROJECT. AREA SHOULD
BE SECURELY COVERED WITH PLASTIC,
CARDBOARD OR TARP. STAGE MATERIALS,
TOOLS AND CLEANING SUPPLIES IN MIXING
AREA PRIOR TO APPLICATION PROCESS.

DO NOT MIX MORE MATERIAL THAN CAN BE
APPLIED IN 20 MINUTES

MIXING PROCEDURE

1 Pre-Mix A-Component in its respective container using Jiffy mixer and drill at low RPMs for 30 seconds to ensure components are fully suspended.

IF USING PIGMENT PACKS, IT IS BEST TO BOX ALL
A-COMPONENTS TOGETHER THEN SEPARATE
BACK INTO INDIVIDUAL CONTAINERS TO ENSURE
EVEN PIGMENTATION.

2 Pre-Mix B-Component in its respective container using clean Jiffy mixer and drill at slow speeds for 30 seconds or until thoroughly homogeneous.

3 Transfer A-component and B-component at a mix rate of 1A:1B by volume into a clean 5-gal bucket and mix for 2-3 minutes at low RPMs being sure to scrape sides of the bucket with a stir stick ensuring both components are thoroughly blended

COVERAGE RATE

150 Ft² / Gal @ 10.7 mils

WORKING TIME

15-20 Minutes @ 75°F

WARMER AMBIENT, PRODUCT AND SURFACE
TEMPERATURES AS WELL AS HIGHER RELATIVE
HUMIDITY WILL SHORTEN POTLIFE AND
WORKING TIME.

APPLICATION PROCEDURE

1 Cut-in edges using a 4" chip brush. Do not allow wet edges to stand more than 10 minutes ahead of application of main body of floor.

POLYASPARTIC SETS SLOWER IN MASS, MIXED
MATERIAL SHOULD BE Poured AS NEEDED

2 Pour a band of mixed material across the surface roughly 6-8" wide. Use 8-12 mil notched squeegee to gauge material across surface

- Maintain wet edge
- Always pour next mixed batch onto wet edge
- Do not apply heavier than recommended coverage rates

3 Back roll the surface with 18" x 3/8" nap roller by walking into the wet material wearing spike shoes and roll the surface wall to wall with overlap perpendicular to your first pass

- Do not overwork material

✓ Allow coating to dry 2-4 Hrs @ 75°F
Do not force dry.
Recoat: 4-12 Hours
Light Traffic: 24 Hours
Heavy Traffic: 48 Hours
Equipment Traffic: 72 Hours

SLIP RESISTANCE

Skid-Resistance – Field (in situ) Wet Dynamic Coefficient of Friction (DCOF), ANSI A326.3. See Crown Polymers Technical Bulletin: 4 Coefficient of Friction.

CLEAN-UP

Clean-up mixing station, tools, and equipment as required. Use acetone, a VOC exempt solvent, for cleaning up. Observe all legal, and health, and safety precautions when handling or storing solvents and materials, particularly in confined spaces. Make sure the working areas are well ventilated at all times during placement and curing time.

DISPOSAL

Dispose of empty packaging and other waste in accordance with federal, state, provinces and local regulations.

MAINTENANCE

Inspect the installed floor by spot cleaning and spot repairing the damaged or cracked areas. To prolong life of the flooring system, a daily maintenance program is highly recommended to ensure the floor is safe for its intended purposes. See Crown Polymers Technical Bulletin: 8 Care and Maintenance.

TECHNICAL SUPPORT

For questions, contact a Crown Polymers Representative. Additional Support Documents are available from Crown Polymers, including brochures, application guidelines, videos and more. Visit Crownpolymers.com or contact Crown for additional resources